

WE SPEAK YOUR LANGUAGE.



Kepeco's Series KLP

A NEW PARADIGM IN THE DESIGN OF A-C TO D-C PROGRAMMABLE POWER SUPPLIES.

TALK. LISTEN.



ETHERNET

Models with the -1.2K suffix provide a LAN port which is an LXI-approved Ethernet-based interface allowing multiple-user access via a standard web browser. The factory default LAN settings on the KLP are DHCP on, AUTOIP on. When the power supply is powered up, it will try to find a DHCP server and get an IP address, if a server is not found, the KLP will use AUTOIP to get an address.



IEEE-488

In all models, the GPIB port accepts a standard GPIB connector and communicates bi-directionally with a GPIB host computer interface. The GPIB input supports LabView G which provides a "soft" panel visible on the driving computer. VXI plug&play is also supported. This also provides a "soft" panel display on the host computer. These functions are described in the KLP Developer's Guide.



RS-232

Models with the -1200 suffix support RS-232 operating at baud rates up to 38,400 (default). The format is compatible with SCPI, offering programming resolution of 0.024% with a readback accuracy of 0.1% of E_{max} or I_{lim} .



ANALOG I/O

The input defaults are 0 to 10V d-c voltage or 0 to 10K ohms resistive. Both voltage setting and current setting are controllable by these analog signals. The maximum levels can be set in the calibration routine to match whatever a user has available (0-5V, 0-3.3V etc.) Readback is a 0-10V proportional signal. Isolated form-C relay contacts provide a composite status flag.

KEPCO'S KLP IS PROGRAMMABLE IN MANY LANGUAGES, USING MANY COMMON INTERFACES.

There are two versions of KLP offered, with differing digital programming options. Models with the suffix -1200 are equipped with GPIB (IEEE-488.2) and RS-232 digital programming ports. Models with the suffix -1.2K are equipped with a LAN (Ethernet, RJ-45) connector in place of the RS-232. The LAN interface is an LXI-approved ethernet-based interface that allows multiple-user access via a standard web browser.



The GPIB port accepts addresses 1 to 31 (factory default is 6). The RS-232 operates at baud rates up to 38,400 (default). All digital programming ports provide SELV (Safety Extra Low Voltage) isolation for operator and equipment protection. The format is compatible with SCPI, offering programming resolution of 0.024% with a readback accuracy of 0.1% of E_{max} or I_{lim} .


All KLP models may be controlled by analog signals, a variable voltage or a variable resistance. These analog inputs are fully isolated from the output and the chassis.

The KLP offers storage of user-programmed active settings. In addition to adding single steps, a user may add multiple steps to produce voltage or current ramps.

Kepeco provides three instrument drivers: IVI-COM, LabView G and VXI plug&play, which simplify programming of the KLP power supply via the digital interfaces. These drivers and sample programs are supplied on a CD shipped with each unit and may be downloaded from the Kepeco website at: www.kepcopower.com/drivers.



Rear view, Ethernet (LAN) port, -1.2K version

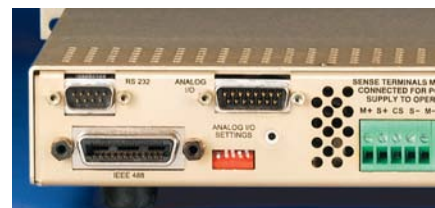

Rear view, RS-232 port, -1200 version

Call us to **TALK** about the Series KLP Power Supplies.


KEPCO, INC. • 131-38 Sanford Avenue • Flushing, NY 11355 USA
Tel: (718) 461-7000 • Fax: (718) 767-1102

Email: hq@kepcopower.com • www.kepcopower.com/klp.htm



Using high-frequency switch-mode topology for high efficiency and small size, the KLP provides 1200 watts of well-regulated, controllable d-c power in a 1U (1.75 inch high) by 19 inch rack-mountable package.

KLP REPLACES THE NEED FOR MULTIPLE POWER SUPPLIES BY EXPANDING THE OPERATING REGION. THE BREAKTHROUGH OF A HYPERBOLIC POWER LIMIT DELIVERS A FULL 1200 WATTS OVER AN EXPANDED OPERATING RANGE, NOT JUST A SINGLE POINT.

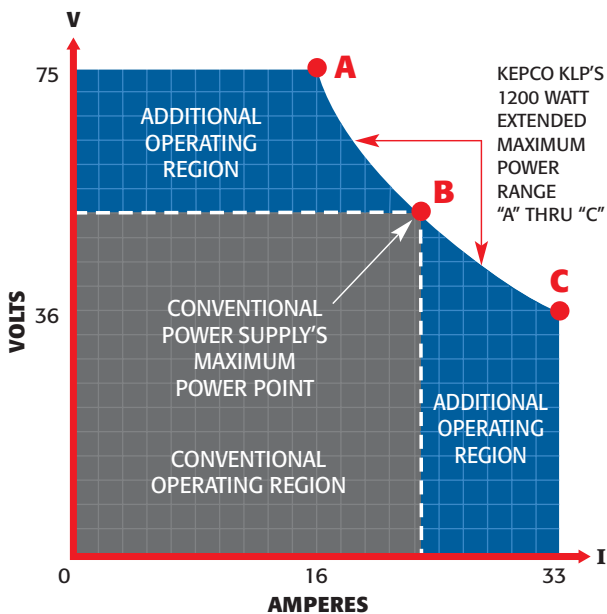

KEPCO IS NOT JUST AHEAD OF THE CURVE, WE'VE FORMED A WHOLE NEW ONE.

The KLP output locus is not limited to the familiar rectangular CV/CC shape used by most laboratory-type power supplies. KLP features a hyperbolic power limit formed by an infinite number of volt-ampere combinations that remain within the power supply's overall 1200 watt power limit. The KLP continuously calculates what the maximum current can be at a given voltage setting to stay within its 1200 watt power envelope.

The result is two loci of constant voltage and constant current forming a third locus by intersecting in a constant power hyperbolic curve. This hyperbolic curve opens a much wider operating range of reduced current at higher voltage and reduced voltage at higher current – operating regions that are unavailable in conventional power supplies.

Because the range of possible outputs from a single KLP model is so much greater than what is customary, KLP supports the idea of a virtual model – a user-defined maximum programmable voltage and current profile, within the 1200 watt power limit and the KLP's voltage and current maxima. Once established, the KLP will not accept programmed values outside of these limits whether from the front panel in local mode, or from the digital (GPIB, RS-232, or LAN) ports, or the analog input ports in remote mode. The virtual-model settings are password protected.

KLP MODEL TABLE

| MODEL | RATED VOLTAGE RANGE ⁽¹⁾ | MAXIMUM CURRENT FOR RATED VOLTAGE | MINIMUM PROGRAMMABLE CURRENT | RATED CURRENT RANGE ⁽¹⁾ | MAXIMUM VOLTAGE FOR RATED CURRENT | RIPPLE AND NOISE ⁽²⁾ | EFFICIENCY @115V a-c |
|--------------------------------|------------------------------------|-----------------------------------|------------------------------|------------------------------------|-----------------------------------|---------------------------------|----------------------|
| KLP 10-150-1.2K ⁽³⁾ | 0-10V | 120A@10V | 3.2A | 0-150A | 8V@150A | 75 mV | 80% |
| KLP 20-120-1.2K ⁽³⁾ | 0-20V | 60A@20V | 1.6A | 0-120A | 10V@120A | 75 mV | 82% |
| KLP 36-60-1.2K ⁽³⁾ | 0-36V | 33.3A@36V | 0.8A | 0-60A | 20V@60A | 125 mV | 83% |
| KLP 75-33-1.2K ⁽³⁾ | 0-75V | 16A@75V | 0.4A | 0-33.3A | 36V@33.3A | 125 mV | 84% |
| KLP 150-16-1.2K ⁽³⁾ | 0-150V | 8A@150V | 0.2A | 0-16A | 75V@16A | 125 mV | 86% |
| KLP 300-8-1.2K ⁽³⁾ | 0-300V | 4A@300V | 0.1A | 0-8A | 150V@8A | 300 mV | 87% |
| KLP 600-4-1.2K ⁽³⁾ | 0-600V | 2A@600V | 0.05A | 0-4A | 300V@4A | 400 mV | 88% |

- (1) The maximum current and voltage are constrained by the 1200 watt power limitation.
 (2) Bandwidth: 20MHz; low frequency ripple may be higher at loads less than 30 Watts.
 (3) Models shown with the suffix -1.2K refer to the LAN (LXI) interface. RS-232 interface models use the suffix -1200. All specifications apply to both types of models.



KEPCO, INC. • 131-38 Sanford Avenue • Flushing, NY 11355 USA
 Tel: (718) 461-7000 • Fax: (718) 767-1102
 Email: hq@kepcopower.com • www.kepcopower.com/klp.htm



AN ISO 9001 COMPANY

KEPCO®
 THE POWER SUPPLIER™
 SINCE 1946



FEATURES

Switch mode topology for cool, efficient operation

GPIB and isolated analog programming standard on all models

-1200 models have an RS-232 interface

-1.2K models replace the RS-232 interface with an Ethernet (RJ-45) connector supporting LAN (LXI)

1U panel height at 1200 watts

Front to back air flow allows full power operation without spacers between supplies

Seven models:

KLP 10-150-*, KLP 20-120-*, KLP 36-60-*, KLP 75-33-*, KLP 150-16-*, KLP 300-8-*, KLP 600-4-*

* -1200 suffix includes RS-232 interface

* -1.2K suffix includes LAN (LXI) interface

Wide-range a-c input, 100-255V a-c with PFC

Dimensions: HxWxD

1.75" x 19" x 17.5"

44.45 x 482.6 x 443.7 mm

Weight:

15 lbs., 6.82kg

FOR FULL SPECS:

www.kepcopower.com/klp.htm



KEPCO, INC. • 131-38 Sanford Avenue
Flushing, NY 11355 USA • Tel: (718) 461-7000
Fax: (718) 767-1102 • Email: hq@kepcopower.com

www.kepcopower.com/klp.htm

KLP INPUT CHARACTERISTICS

| SPECIFICATIONS | | RATING/DESCRIPTION | CONDITION |
|-----------------------|-----------------|--------------------|-------------------------------|
| a-c Voltage | nominal | 100-240V a-c | Single phase |
| | range | 100-255V a-c | Wide range |
| d-c Voltage | range | 125-420V d-c | No regulatory agency approval |
| Frequency | nominal range | 50-60 Hz | Single phase |
| | maximum | 45-440 Hz | Increased leakage above 66 Hz |
| Power Factor | typical | 0.99 | Meets EN 61000-3-2 |
| Maximum Input Current | 120V a-c | 13A rms | Rated load (1200W) |
| | 240V a-c | 6.5A rms | |
| Inrush Current | 265V a-c | 40A | Peak |
| | 132V a-c | 20A | |
| Input Fusing | | Circuit Breaker | 2-line |
| Low a-c Protection | | Self Protected | No fixed limits |
| Output Hold Up | typical | 10 milliseconds | Ride through |
| Leakage Current | 115V a-c, 60 Hz | 5mA | |
| | 230V a-c, 50 Hz | 10mA | |

KLP OUTPUT CHARACTERISTICS

| SPECIFICATIONS | | RATING/DESCRIPTION | CONDITION |
|------------------------------------|------------------------|---|--------------------------------------|
| Stabilizer Type | | CV/CC | Voltage/Current |
| Adjustment Range | voltage | 0-100% of rated voltage | No minimum load required |
| | current | min-100% of rated current ⁽¹⁾ | |
| Source Effect | voltage | 0.01% E _{max} | Over full source range |
| | current | 0.01% I _{max} | |
| Load Effect | voltage | 0.01% E _{max} | Over full load current range |
| | current ⁽²⁾ | 0.02% I _{max} | |
| Temperature Effect | voltage | 0.2%/°C | 0-50°C |
| | current | 0.2%/°C | |
| Time Effect (drift) | voltage | 0.05%/24hr | After 30 minute warmup |
| | current | 0.05%/24hr | |
| Error Sensing | | 0.25 volts per wire | Above rated output |
| Isolation Voltage | | 600V d-c or peak | Either output terminal to ground |
| Transient Recovery for Load Change | excursion | 1% of E _{max} | 50% load step 2A/μsec max |
| | recovery | 2 msec | Return to 0.1% of setting |
| Turnon/turnoff Overshoot | | Same as load transient response limits | |
| Overvoltage Protection | voltage | 20-120% of E _{max} | User selectable recovery |
| Overcurrent Protection | current | 72-120% of I _{max} | User selectable recovery |
| Overtemperature Protection | | Shutdown | User selectable recovery |
| Output Lead Fault Protection | | Shutdown | User selectable recovery |
| Parallel Operation | | Active load sharing within 5% of I ₀ rated | Up to 5 units maximum ⁽³⁾ |

(1) See Model Table for minimum programmable current.

(2) After settling effect.

(3) -1.2K models are not Master/Slave capable.