


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
C	10506	NOTE 6 MATES WITH DYTRAN 6967AXX... WAS: MATES WITH DYTRAN 6811AXX OR 6824AXX...	RLA, 10/29/13	RLA	AB

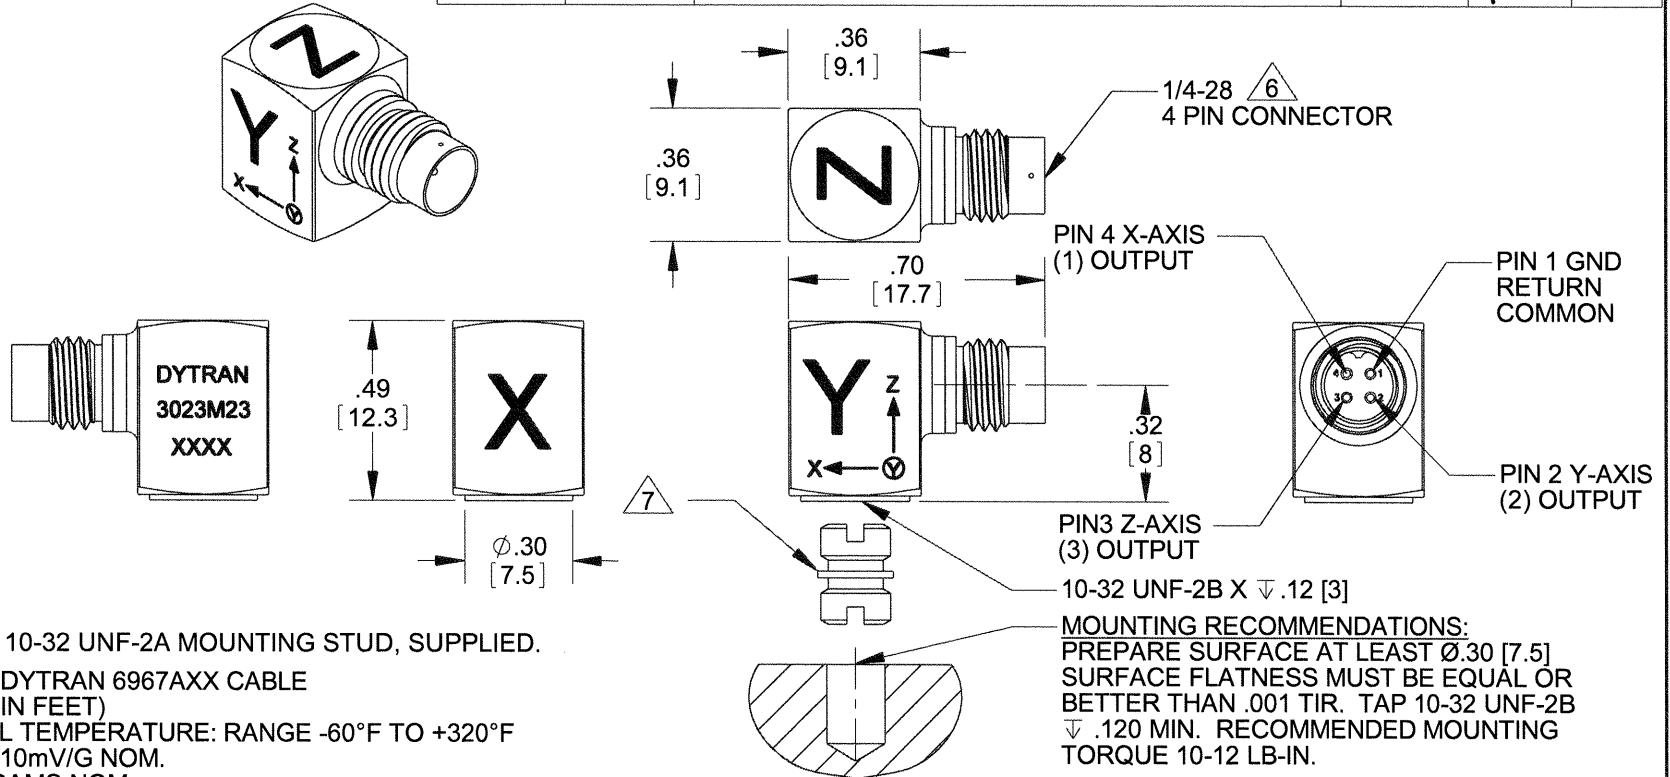

- 7 MODEL 6200, 10-32 UNF-2A MOUNTING STUD, SUPPLIED.
 - 6 MATES WITH DYTRAN 6967AXX CABLE (XX=LENGTH IN FEET)
 - 5. OPERATIONAL TEMPERATURE: RANGE -60°F TO +320°F
 - 4. SENSITIVITY: 10mV/G NOM.
 - 3. WEIGHT: 4 GRAMS NOM
 - 2. ARROWS INDICATE ACCELERATION DIRECTION FOR POSITIVE OUTPUT
 - 1. MATERIAL: TITANIUM ALLOY
- NOTES: UNLESS OTHERWISE SPECIFIED.

CONTRACT NO.



TITLE: **OUTLINE/INSTALLATION DRAWING, MODEL 3023M23**

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-3023M23	C

SCALE: 4:1 SOLIDWORKS SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING. ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	
3023M23	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 .X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25
USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	

APPROVALS		DATE
ORIG	PML	5/24/07
CHK	CES	08/21/07
APP	PML	08/21/07
APP		
DO NOT SCALE DRAWING		

