




PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS, INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
C	12622	SEE ECN	EM 04/20/16	MH	AS

MODEL	SENSITIVITY
3221C	10 pC/G ± 15%
3221C2	6 pC/G ± 25%

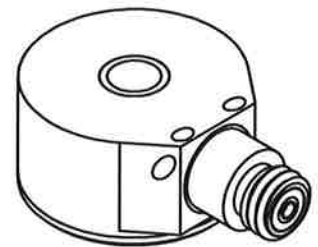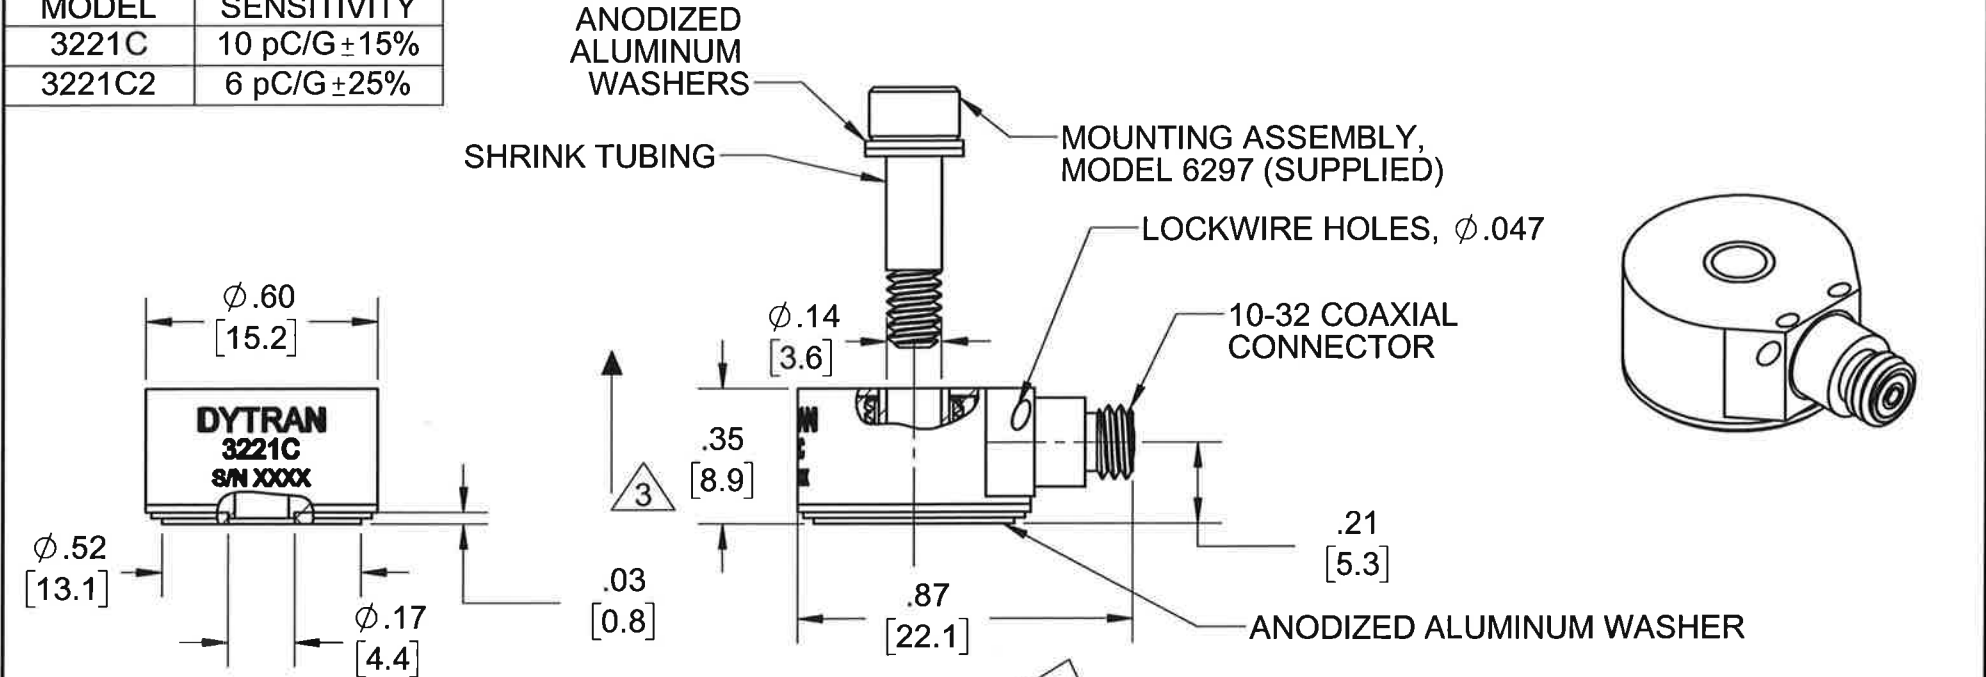

MOUNTING RECOMMENDATIONS:
 CLEAN SURFACE AT LEAST $\phi .55$, FLAT TO $.0001$ TIR
 TAP 6-32 UNC-2B AT LEAST $\downarrow .13$
 USE SILICON GREASE, TORQUE TO 5-7LB-IN

- 5. MAXIMUM OPERATING TEMPERATURE: 500 °F
- 4. MATERIAL, HOUSING/CONNECTOR: TITANIUM ALLOY
- 3. DIRECTION OF ACCELERATION FOR POSITIVE OUTPUT
- 2. SENSITIVITY: SEE TABLE
- 1. WEIGHT, MAX: 9.0 GRAMS

NOTES: UNLESS OTHERWISE SPECIFIED

USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	

UNLESS OTHERWISE SPECIFIED:
 INTERPRET DIM & TOL PER ASME Y14.5M - 1994.
 REMOVE BURRS.
 COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA.
 CHAM EXT THDS 45° TO MINOR DIA.
 THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS.
 THDS PER MIL-S-7742.
 DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN $.005$.
 BREAK SHARP EDGES $.005$ TO $.010$.
 MACHINED FILLET RADII $.005$ TO $.015$.
 WELDING SYMBOLS PER AWS A2.4.
 ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS
 TOLERANCES ARE:
 INCHES METRIC ANGLES
 $.XX \pm .03$ $.X \pm 0.8$ $\pm 1^\circ$
 $.XXX \pm .010$ $.XX \pm 0.25$

MATERIAL

FINISH

DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS		DATE
ORIG	DV	08/14/09
CHK	DV	06/24/10
APP	ANS	06/24/10
APP		

DYTRAN INSTRUMENTS, INC. Chatsworth, CA


MASTER ONLY IF IN RED

TITLE: **OUTLINE/INSTALLATION DRAWING, MODEL 3221C**

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-3221C	C

SCALE: 2:1 SOLIDWORKS SHEET 1 OF 1

MODEL NUMBER 3221C2	PERFORMANCE SPECIFICATION		DOC NO. PS3221C2
	CHARGE MODE ACCELEROMETER		REV F, ECN 13556, 07/10/17

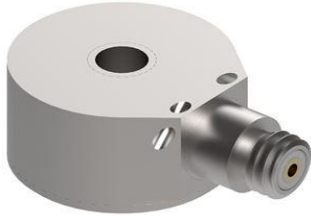

- MINIATURE SIZE
- HIGH TEMPERATURE OPERATION
- HERMETICALLY SEALED

PHYSICAL

Weight, Max
Mounting Provision
Connector [1]
Case Material
Sensing Element Type

ENGLISH		SI	
0.32	oz	9.0	grams
Ø.140 THRU HOLE		Ø.140 THRU HOLE	
10-32		10-32	
Ti 6Al-4V		Ti 6Al-4V	
Piezoceramic		Piezoceramic	

PERFORMANCE

Sensitivity, +/-25% [2] [3]
Range F.S.
Frequency Response, +/- 10%
Mounted Resonant Frequency
Amplitude Non-Linearity
Transverse Sensitivity, Max
Strain Sensitivity @250/μ

6	pC/g	0.61	pC / m/s ²
[7]		[7]	
[5] to 10000	Hz	[5] to 10000	Hz
>30	kHz	>30	kHz
1	%F.S MAX	1	%F.S MAX
5	%	5	%
0.08	g/μ	0.78	m/s ² /μ

ENVIRONMENTAL

Maximum Vibration
Maximum Shock
Temperature Range
Environmental Seal

1500	g rms	14700	m/s ² rms
5000	g	49000	m/s ²
-60 to +500	°F	-51 to + 260	°C
Hermetic		Hermetic	

ELECTRICAL

Output Signal Polarity
Case Grounding
Base Grounding

Positive	Positive
Case is grounded	Case is grounded
Base is isolated	Base is isolated

This family also includes:

Model	Sensitivity (pC/g)	Range F.S. (g)	Operating Temperature (°F)
3221C	10	[7]	-60 to +500



Please, refer to the performance specifications of the products in this family for detailed description.

Supplied Accessories

- 1) Model 6297 mounting assembly
- 2) Accredited calibration certificate (ISO 17025)

Notes:

- [1] Connector , radially mounted, 10-32 coaxial
- [2] Measured at 100 Hz, 1 G RMS per ISA RP37.2.
- [3] Actual sensitivity is on a calibration certificate supplied with each instrument.
- [4] Low frequency response is dependent upon the discharge time constant of the charge amplifier.
- [5] Unit can survive a intermittent exposure to 600°F MAX
- [6] In the interest of constant product improvement, we reserve the right to change specifications without notice.
- [7] This parameter depends on the gain settings of the charge amplifier used.

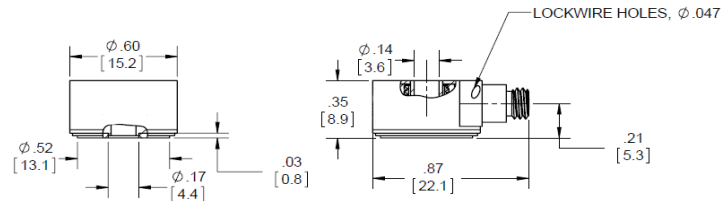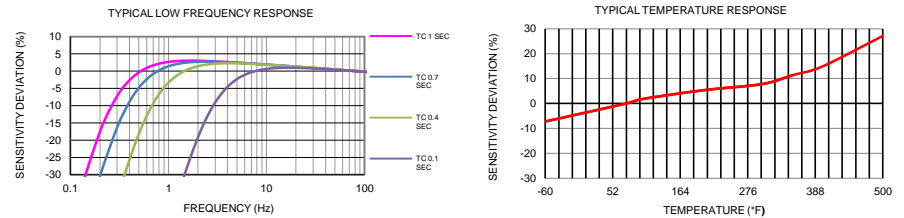

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3221C for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.700.7880 www.dytran.com
For permission to reprint this content, please contact info@dytran.com