
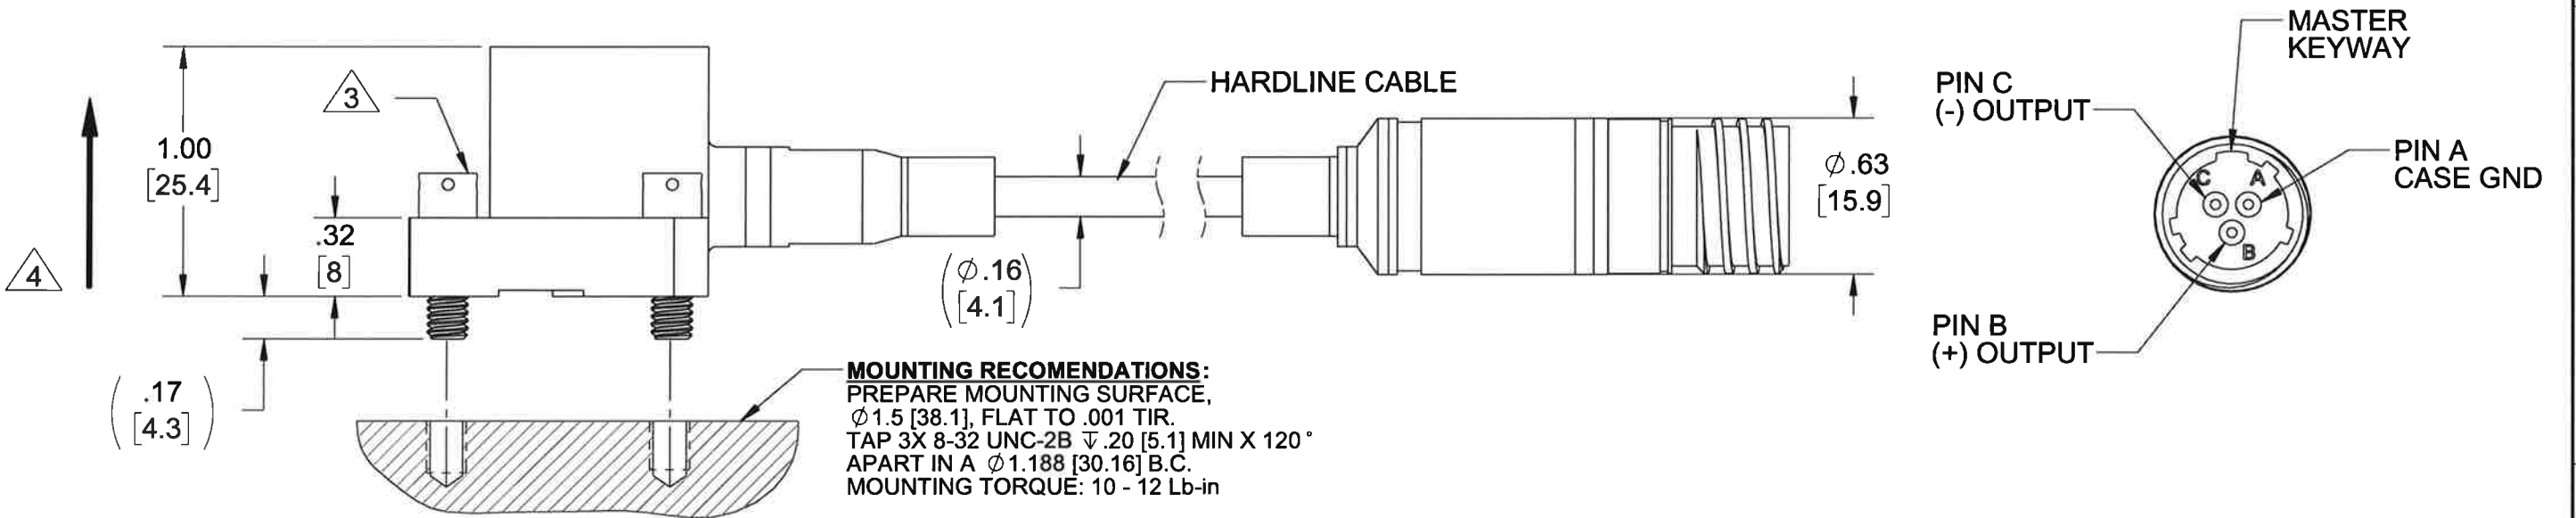


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	13007	INITIAL RELEASE	DP 12/06/17	PA	AS

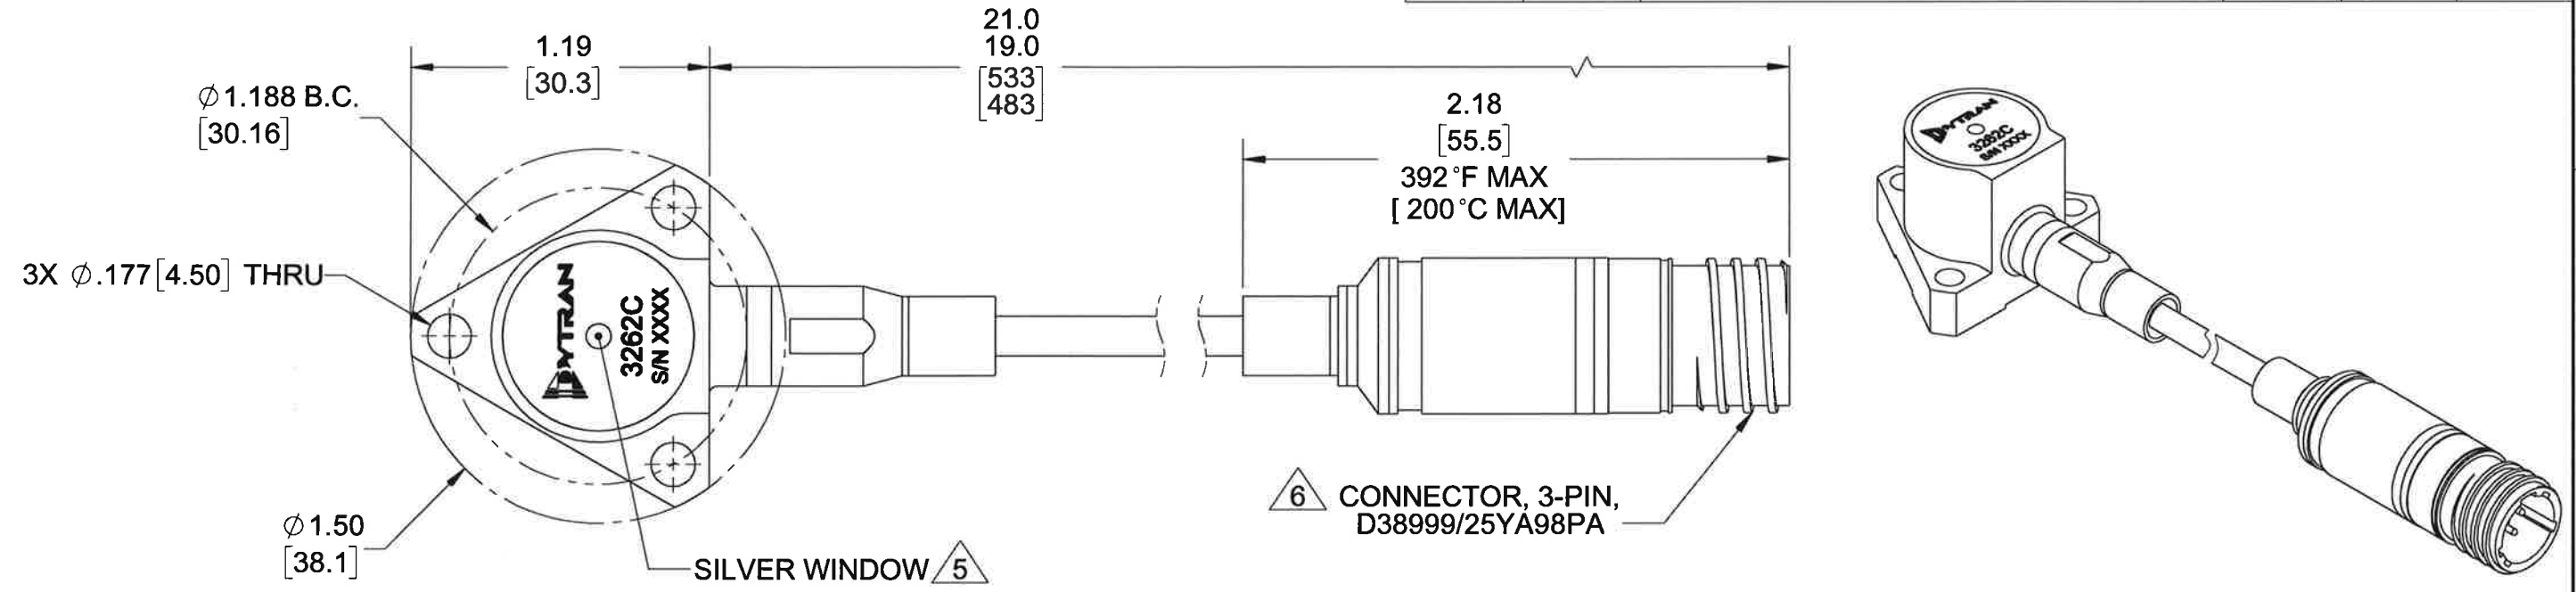

MOUNTING RECOMENDATIONS:
 PREPARE MOUNTING SURFACE,
 Ø 1.5 [38.1], FLAT TO .001 TIR.
 TAP 3X 8-32 UNC-2B $\sqrt{.20}$ [5.1] MIN X 120°
 APART IN A Ø 1.188 [30.16] B.C.
 MOUNTING TORQUE: 10 - 12 Lb-in

- 6 MATES WITH D38999/26WA98SA
 - 5 U.S. PATENT NUMBER US 8,375,793 APPLIES TO THIS UNIT.
 - 4 ARROW INDICATES DIRECTION OF ACCELERATION TO PROVIDE POSITIVE (+) SIGNAL ON PIN B AND NEGATIVE (-) SIGNAL ON PIN C.
 - 3 MOUNTING SCREW, MODEL 6535, 8-32 X .50 L, QTY. 3, SUPPLIED
2. CONNECTOR, HARDLINE CABLE MATERIAL: 300 SERIES S.S.
 1. HOUSING MATERIAL: ALLOY 600
 NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. DIMENSIONS APPLY AFTER FINISHING.		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE:			
DECIMALS .XX ±.03 .XXX ±.010	METRIC .X ±.08 .XX ±.025	ANGLES ±1°			
APPROVALS		DATE		TITLE: OUTLINE/ INSTALLATION DWG, HIGH TEMP ACCELEROMETER, MODEL 3262C	
ORIG	LN	03/21/17		SIZE	CAGE CODE
CHK	PA	12/06/17		B	2W033
APP	AS	12/8/17		DWG NO	127-3262C
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION USA		SCALE:	1.5:1
				REV	A
				SHEET 1 OF 1	



- HIGH TEMPERATURE OPERATION (1200°F [649°C])
- EXTREME STABILITY OVER TEMPERATURE
- HERMETICALLY SEALED
- DIFFERENTIAL OUTPUT

PHYSICAL	
Weight, Max.	Accelerometer
	Accelerometer and cable
	Cable Length
Connector [1]	Type
	Material
Housing	Material
Sensing Element	Material
	Mode

ENGLISH		SI	
3.5	oz	100	grams
5.78	oz	165	grams
19	inch	483	mm
3-pin		3-pin	
D38999/25YA98PA		D38999/25YA98PA	
300 Stainless Steel		300 Stainless Steel	
Alloy 600		Alloy 600	
Single Crystal		Single Crystal	
Shear		Shear	

PERFORMANCE	
Sensitivity, ± 10% [2]	
Acceleration Range	
Frequency Response	±5%
	±10%
Resonance Frequency	
Transverse Sensitivity	
Insulation Resistance at Temperature	400°F [204°C] 700°F [371°C] 900°F [482°C] 1200°F [649°C]
Operating Temperature	
Capacitance, Pin to Pin, Nom.	
Unbalance between pins	
Linearity	

5.0	pC/g	0.51	pC/m/s ²
[3]	g peak	[3]	m/s ² peak
[4] - 2500	Hz	[4] - 2500	Hz
[4] - 5,000	Hz	[4] - 5,000	Hz
> 25	kHz	> 25	kHz
<5	%	<5	%
>1	GΩ	>1	GΩ
>5	MΩ	>5	MΩ
>500	kΩ	>500	kΩ
>20	kΩ	>20	kΩ
-67 to +1200	°F	-55 to +649	°C
155	pF	155	pF
<2	pF	<2	pF
±1	%	±1	%

ENVIRONMENTAL	
Maximum Vibration	
Maximum Shock	
Seal	
Magnetic Sensitivity at 100 Gauss	
Base Strain Sensitivity	

1000	Gpeak	9810	m/s ² peak
1000	Gpeak	9810	m/s ² peak
Hermetic		Hermetic	
0.00007	g/Gauss	0.00069	m/s ² Gauss
0.001	g/μs	0.01	m/s ² /μs

This family also includes:

Model	Sensitivity (mV/g)	Frequency Response (Hz)	Time Constant (Sec)	Operating Temp (°F)



Refer to the performance specifications of the products in this family for detailed description

Supplied Accessories:

- 1) Model 6535 mounting screws, 8-32 X .50 L , Qty. 3
- 2) Accredited Calibration Certificate (ISO 17025)

Notes:

- [1] Mates with D38999/26WA98SA
- [2] Actual sensitivity is given on a calibration certificate
- [3] Depends on the gain setting of the charge amplifier used
- [4] Low frequency response is a function of the discharge time constant of the charge amplifier used. Refer to the plot below for frequency response with different time constants.

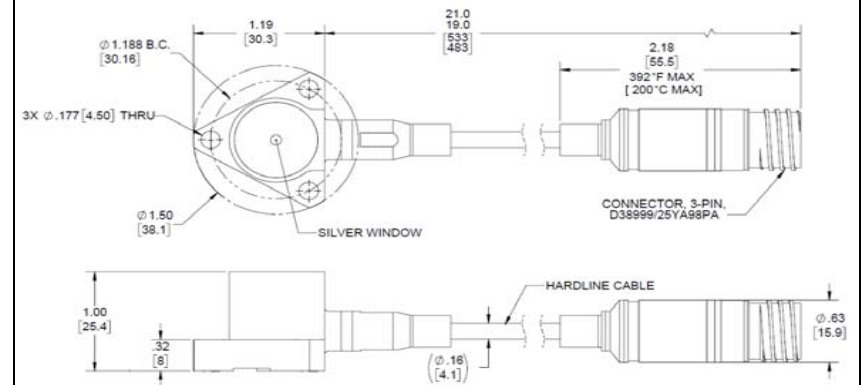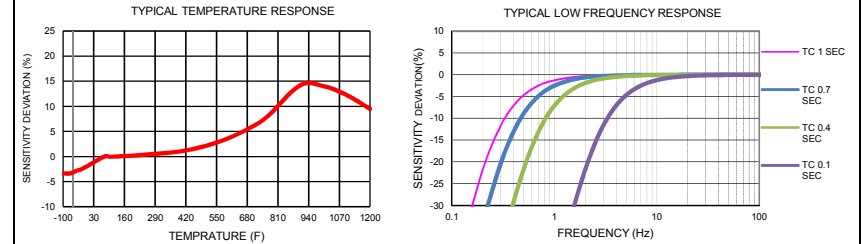

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3262C for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax: 818.700.7880 www.dytran.com
For permission to reprint this content, please contact info@dytran.com