


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	7482	INITIAL RELEASE	RA, 05/19/11	DV	ANS
B	9494	UPDATED VIEW OF CONNECTOR	AB 05/03/13	<i>mu</i>	<i>AS</i>

MODEL	SENSITIVITY
3274A1	5mV/G
3274A2	10mV/G
3274A3	25mV/G

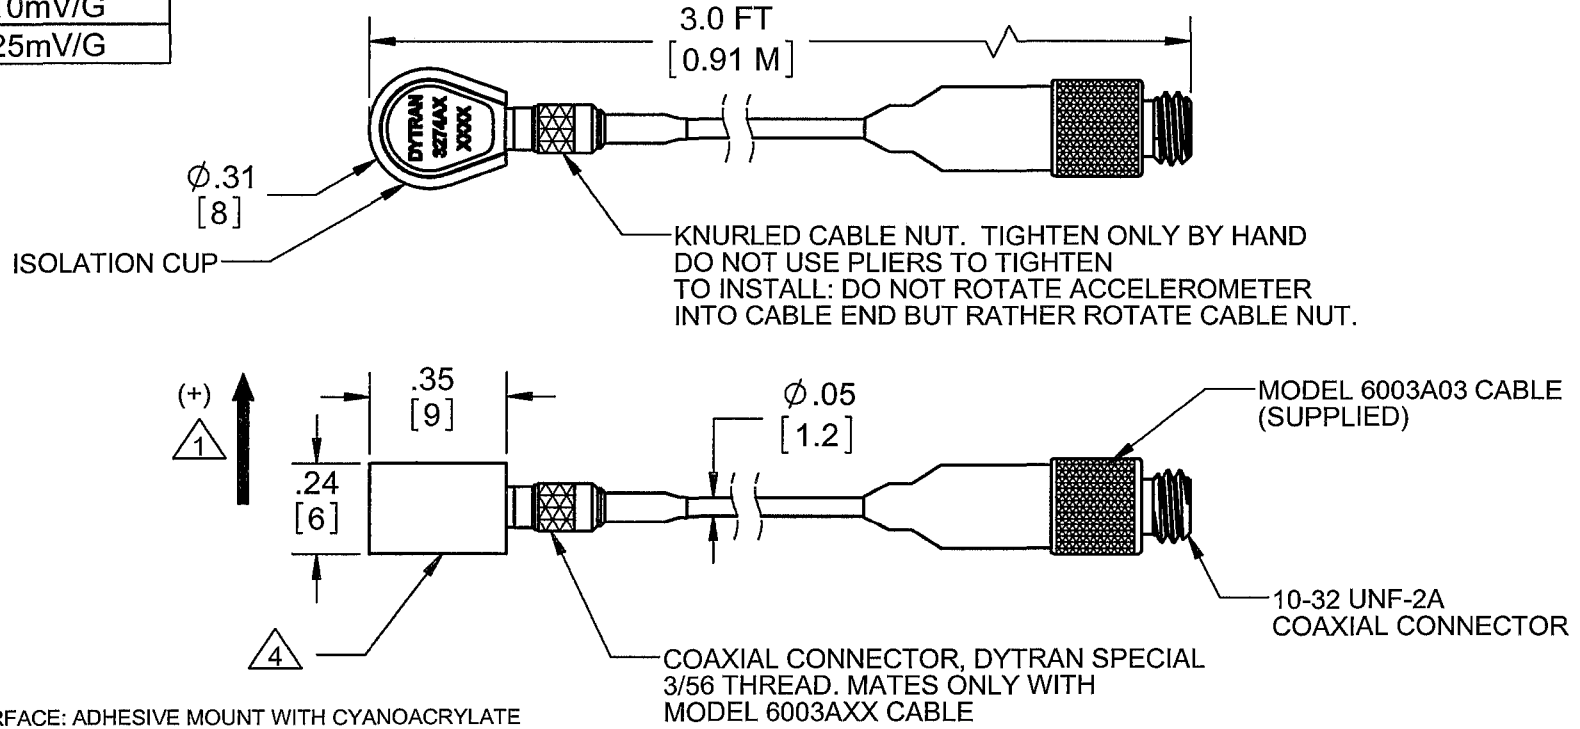

- 4 MOUNTING SURFACE: ADHESIVE MOUNT WITH CYANOACRYLATE OR DYTRAN MOUNTING WAX MODEL 6298
- 3. CASE AND CONNECTOR MATERIAL: TITANIUM
- 2. WEIGHT LESS CABLE: 2 GRAMS MAX
- 1 ARROW INDICATES DIRECTION OF ACCELERATION FOR POSITIVE OUTPUT.

NOTES: UNLESS OTHERWISE SPECIFIED

USED ON	NEXT ASSY	UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.
APPLICATION		
THIRD ANGLE PROJECTION USA		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 .X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25
ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.		

CONTRACT NO.	
APPROVALS	DATE
ORIG RA	05/19/11
CHK DV	05/27/11
APP ANS	05/27/11
APP	
DO NOT SCALE DRAWING	



TITLE: OUTLINE INSTALLATION DRAWING 3274A SERIES			
SIZE A	CAGE CODE 2W033	DWG. NO. 127-3274A	REV B
SCALE: NONE	SOLIDWORKS	SHEET 1 OF 1	

MODEL NUMBER 3274A2	PERFORMANCE SPECIFICATION	DOC NO. PS3274A2
	ACCELEROMETER , IEPE	REV F, ECN 14341, 07/13/18



- MINIATURE SIZE
- REMOVABLE CABLE WITH 10-32 CONNECTOR
- HERMETICALLY SEALED
- TEDS FEATURE

This family also includes:

Model	Sensitivity (mV/g)	Range (g's)	Resolution (Grms)	Oper. Temp(°F)	TC
3274A1	5	1000	0.014	-60 to +250	0.3 to 0.8
3274A3	25	200	0.0009	-60 to +225	0.3 to 0.8

Refer to the performance specifications of the products in this family for detailed description.




Supplied Accessories

- 1) Model 6591A installation wrench
- 2) Model 6298 small petro mounting wax
- 3) Accredited calibration certificate (ISO 17025)
- 4) Model 6003A03 cable assembly

Notes:

- [1] Flat mounting surface for adhesive mount.
- [2] Mates with Dytran cable 6003AXX (XX is cable length in feet)
- [3] Measured at 100 Hz, 1 grms per ISA RP37.2.
- [4] Percent of full scale or any lesser range, zero based best-fit straight line method.
- [5] Do not apply power to this device without current limiting, 20mA max, to do so will destroy the integral IC amplifier
- [6] Typical. Not to exceed 0.010 Grms [0.10 m/s²]

		ENGLISH		SI	
PHYSICAL					
Weight, Max	(Less Cable)	0.07	oz	2	grams
Mounting Provision		[1]		[1]	
Connector	Radially Mounted	3-56		3-56	
Cable Length		36	Inches	914	mm
Case Material		Titanium		Titanium	
Isolation Cup Material		Anodized Aluminum		Anodized Aluminum	
Sensing Element	Material	Quartz		Quartz	
	Mode	Shear		Shear	
PERFORMANCE					
Sensitivity, ± 10% [3]		10	mV/g	1.02	mV/m/s ²
Range F.S For ± 5 Volts Out		± 500	g's	± 4905	m/s ²
Frequency Response, +/- 10%		1.1 to 10000	Hz	1.1 to 10000	Hz
Mounted Resonant Frequency		> 40	kHz	> 40	kHz
Amplitude Non-Linearity [4]		2	%F.S	2	%F.S
Transverse Sensitivity, Max		5	%	5	%
Noise Resolution [6]		0.007	grms	0.07	m/s ² rms
Strain Sensitivity @250/µε		0.04	g/µε	0.39	m/s ² /µε
ENVIRONMENTAL					
Maximum Vibration		600	Grms	5880	m/s ² rms
Maximum Shock		5000	Gpeak	49000	m/s ² peak
Temperature Range		-60 to +250	°F	-51 to +121	°C
TEDS Operating Temperature		-40 to +185	°F	-40 to +85	°C
Environmental Seal		Hermetic		Hermetic	
ELECTRICAL					
Supply Current/Compliance Voltage Range [5]		2 to 20/+18 to +30	mA/Volts	2 to 20/+18 to +30	mA/Volts
Output Impedance, TYP		100	Ω	100	Ω
Bias Voltage		+7 to +9	VDC	+7 to +9	VDC
Discharge Time Constant		0.3 to 0.8	Sec	0.3 to 0.8	Sec
TEDS Feature		IEEE 1451.4		IEEE 1451.4	
Case Isolation		10	GΩ	10	GΩ

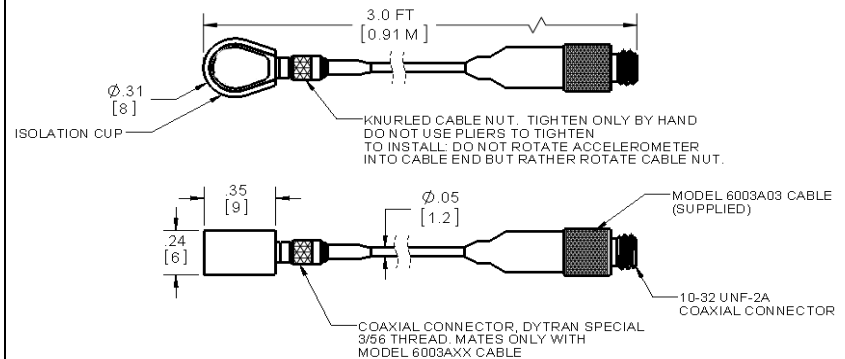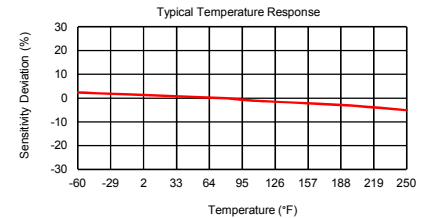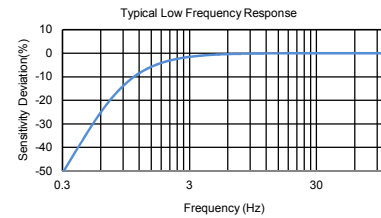

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3274A for more information.

